


PENTA

3d wall®

Technical Data

Model No	DMR003 - Penta
Panel Dimensions	Thickness Lowest 1.78" (42,5 mm), Highest 2.85" (72,5 mm) Length x Width 7.08"x7.08" (180x180 mm)
Material	Strengthen, light and strong copolymer. Thickness 0.08" (2 mm)
Colours	Standart: Black Matt, Gold, Silver, Anthracite, Smoke Gray, White. (Min order quantity 10.76 ft ² /1m ²), Custom: All RAL code colors (Matt or Glossy) are available in request (Min order quantity 107.6 ft ² /10m ²)
Package	Cartoon Box, Cover area 10.76 ft ² (1m ²), Weight 11.24 lbs/ft ² (5.1 kgs/m ²), 30 panels , (One box consist one color!)
Suitability	Interior (for exterior use, additional finishes needed. Please, send a request!)

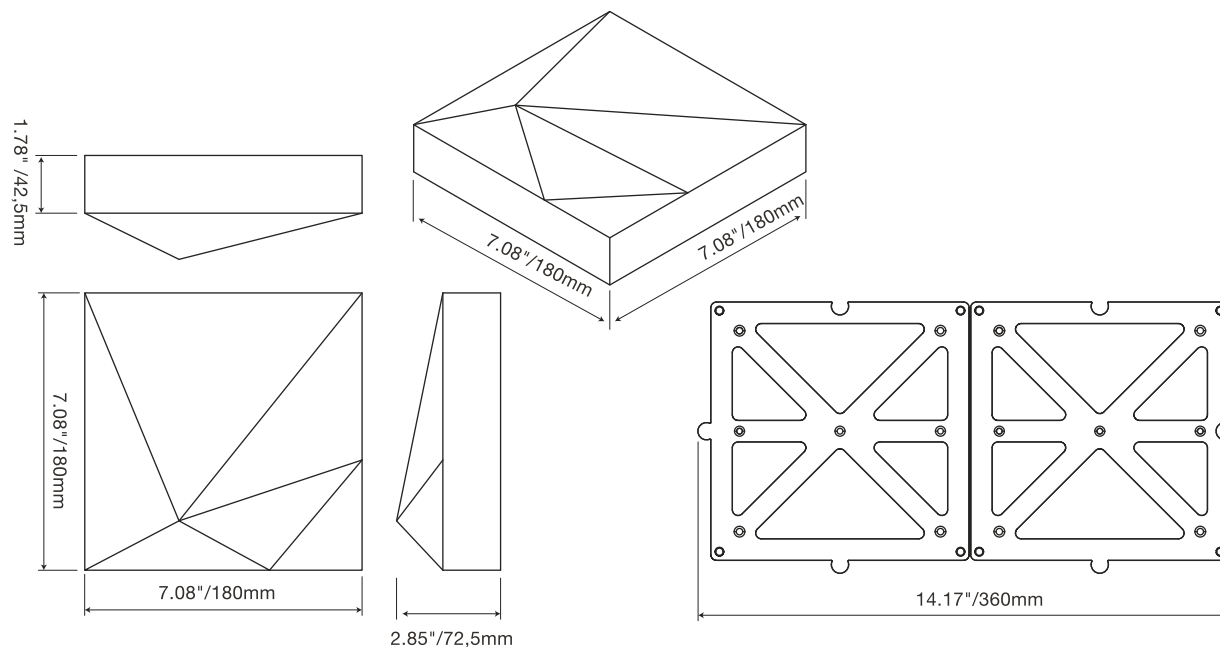

General Performance Data



Flammability
UL94 / V-0
(Optional)



Surface Quality
A1




Flexural Strength
ISO178 / 63MPa



Size Accuracy
+/-0,05%




Temperature
Resistance
-40.0/185°F
-40/+85 °C




Thickness
Accuracy
+/-0,005%

1

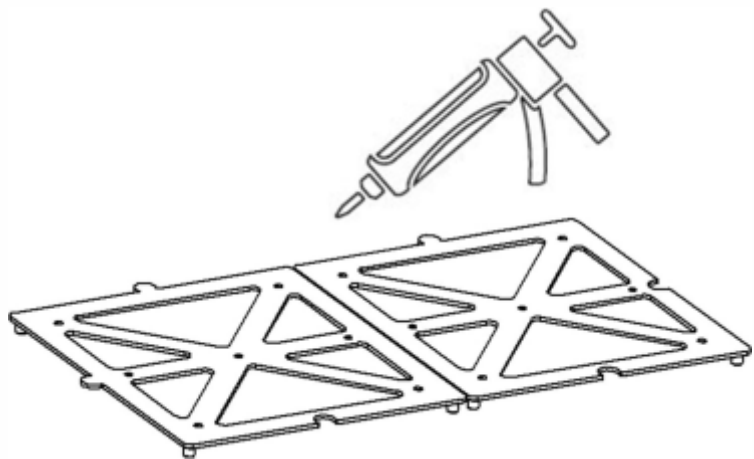

Apply silicone behind the bottom apparatus.


2

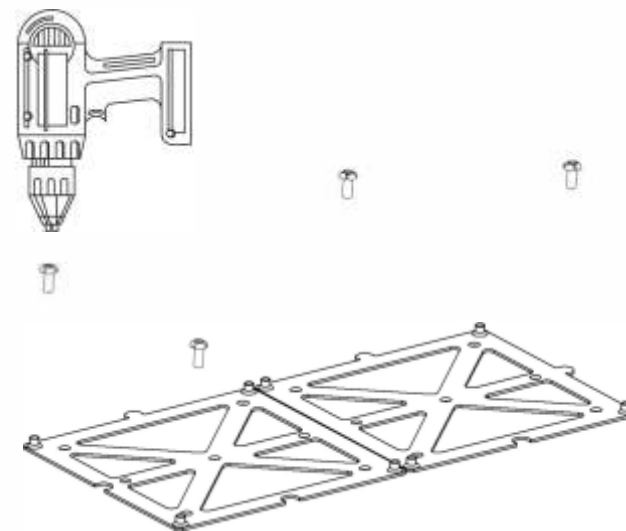

IF NEEDED!


Screw the apparatus from determined points.

3

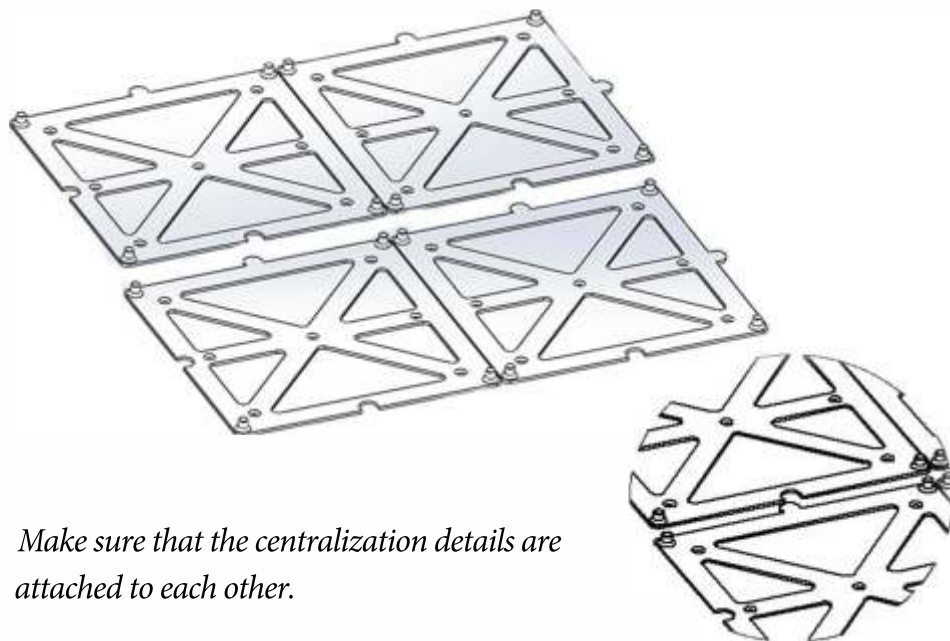

Make sure that the centralization details are attached to each other.

4

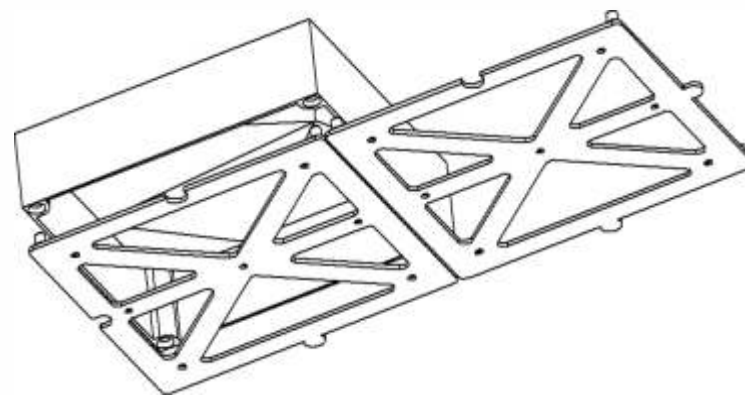

Complete installation process by attaching the top part of the product to the already installed bottom apparatus.